


DAVIEW MINI



DATASHEET

4
channels

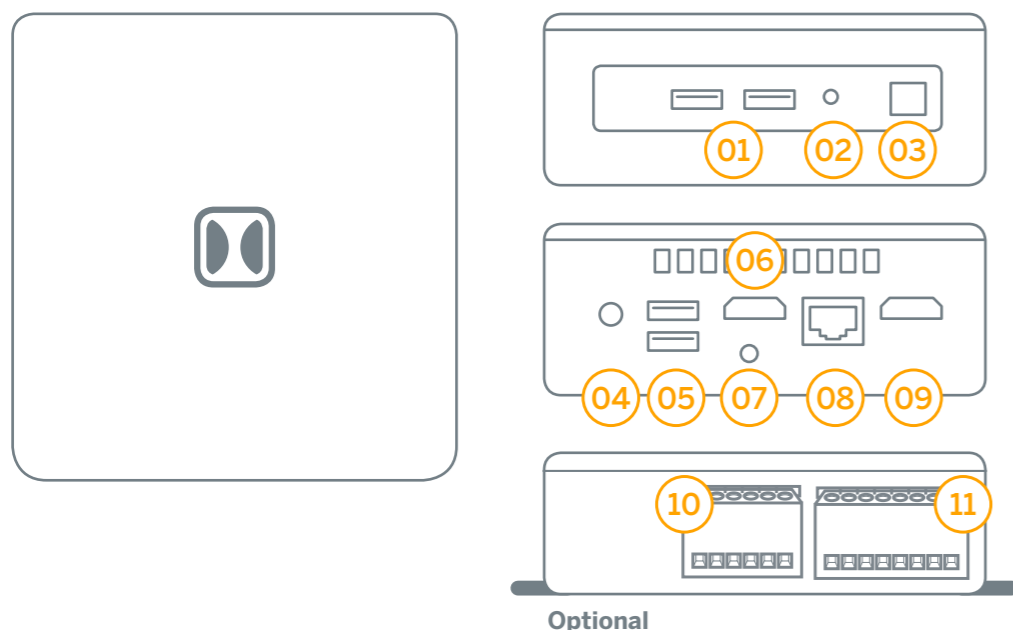

- 01 - USB 3.0 connections 02 - Audio output 03 - Power button 04 - DC power connector
- 05 - USB 3.0 connections 06 - HDMI port 07 - Audio output 08 - RJ45 network connector 10/100/1000
- 09 - HDMI port 10 - 4 digital inputs 11 - 4 relays NA/NC

Intruder	Loitering
Vehicles	Appearance / disappearance
Entry / exit	Combination of rules
Tampering	

TECHNICAL SPECIFICATIONS

Processor	Intel
Memory (RAM)	4 GB
Hard drive	NAND flash memory based SSD (Solid State Drive)
Power supply	DC Power 12-19V, 65W (external power supply)
Power consumption	Approx. 30 W at full load
Environment operating temperature	0°C to +40°C
Storage Temperature	-20°C to +60°C
Environmental class	II (Indoor - General)
Housing	Ultra compact housing
Device dimensions	115 x 111 x 51 mm / 4,55" x 4,57" x 2,01"
Weight	630 gr
Communication protocols	TCP/IP, SMTP
Input and output ports	Input: 900, 5500, 21000 (customizable) Output: 9034, 465 (customizable)
Data protection	Digital signature

OPTIONAL

Input activation signal	USB external device, 4 inputs
Relay outputs	USB external device, 4 N/O relay outputs (dry contact), max. 6A at AC
Daview AMS	Alarm Management System for CMS with ClickThru™ technology

67 m
/73 yd
of detection

Range table for day/night cameras

	f (mm/inch)	Height (m/ft)	Sensor	HFOV (°)	Blind distance (m/yd)	Distance (m/yd)
Standard view	3/0,12	4/13	(1/3)"	77°	2/2	32/35
	8/0,31	4/13	(1/3)"	33°	8/9	67/73

DAVANTIS TECHNOLOGIES SL | Barcelona · Spain | Madrid · Spain |
Nice · France | Luedinghausen · Germany | Bogota · Colombia | Singapore

DAVANTIS TECHNOLOGIES INC | Washington DC · USA

info@davantis.com
www.davantis.com

